



Fine Material Washers

Description

These heavy duty fine material washers are ideally suited for removing material in applications such as fines recovery, sand manufacturing, concrete reclamation, salt reclamation, and municipal waste removal.



44" x 32' Fine Material Washer

Built with large, three stage gearboxes and outboard lower bearing assemblies, the units are designed for long operating life and maintenance ease. Trio washing equipment is fabricated with heavy duty tubs, ensuring an operating life that will exceed that of the competition.

These products are designed and manufactured with more than twenty years of operating knowledge of washing equipment and are widely accepted throughout the world.

Operating Principles

Feed material enters the feed box and is distributed into the washer's settling pool. Internal and external baffles control the feed velocity and limit water current speeds and turbulence, enabling the washers to retain fines.

Lighter products such as silt, excessively fine material, and other deleterious materials do not have time to settle and are carried away with the water over the long, adjustable side and end weirs.

The settled material is augured up the washers by the spiral flights. Additional cleaning takes place by the abrading action of the material fractions.

Excess water is drained back to the pooling area as the material is conveyed up and out the upper end of the trough.

Applications

Manufactured Sand

Cement Reclamation

Dewatering

Sand & Gravel

Models/Sizes

36" x 25' Single

36" x 25' Twin

44" x 32' Single

44" x 32' Twin

54" x 34' Single

54" x 34' Twin

Other Considerations

One year warranty

Exceptional quality

Off-the-shelf parts

Nationwide distribution

Low price guarantee

Michigan Aggregate Machinery

P.O. Box 838, Northville, Michigan, 48167

Tel: 248-349-8887 Fax: 248-349-6091


Website: www.michagg.com Email: sales@michagg.com



Fine Material Washers

	36" x 25' Single	36" x 25' Twin	44" x 32' Single	44" x 32' Twin	54" x 34' Single	54" x 34' Twin
Capacity (TPH)	100	200	175	350	275	550
Maximum Material Size	3/8" (9 mm)	3/8" (9 mm)	3/8" (9 mm)	3/8" (9 mm)	3/8" (9 mm)	3/8" (9 mm)
HP (Electric)	15	15 (two)	25	25 (two)	40	40 (two)
Water (GPM @ 25 PSI)	40/360	105/620	60/740	125/1,400	60/950	125/2,050
Max Screw Speed (RPM)	21	21	17	17	14	14
Weight	13,000	23,000	21,500	38,000	32,000	61,000

NOTE: Designs & specifications subject to periodic change without notice.

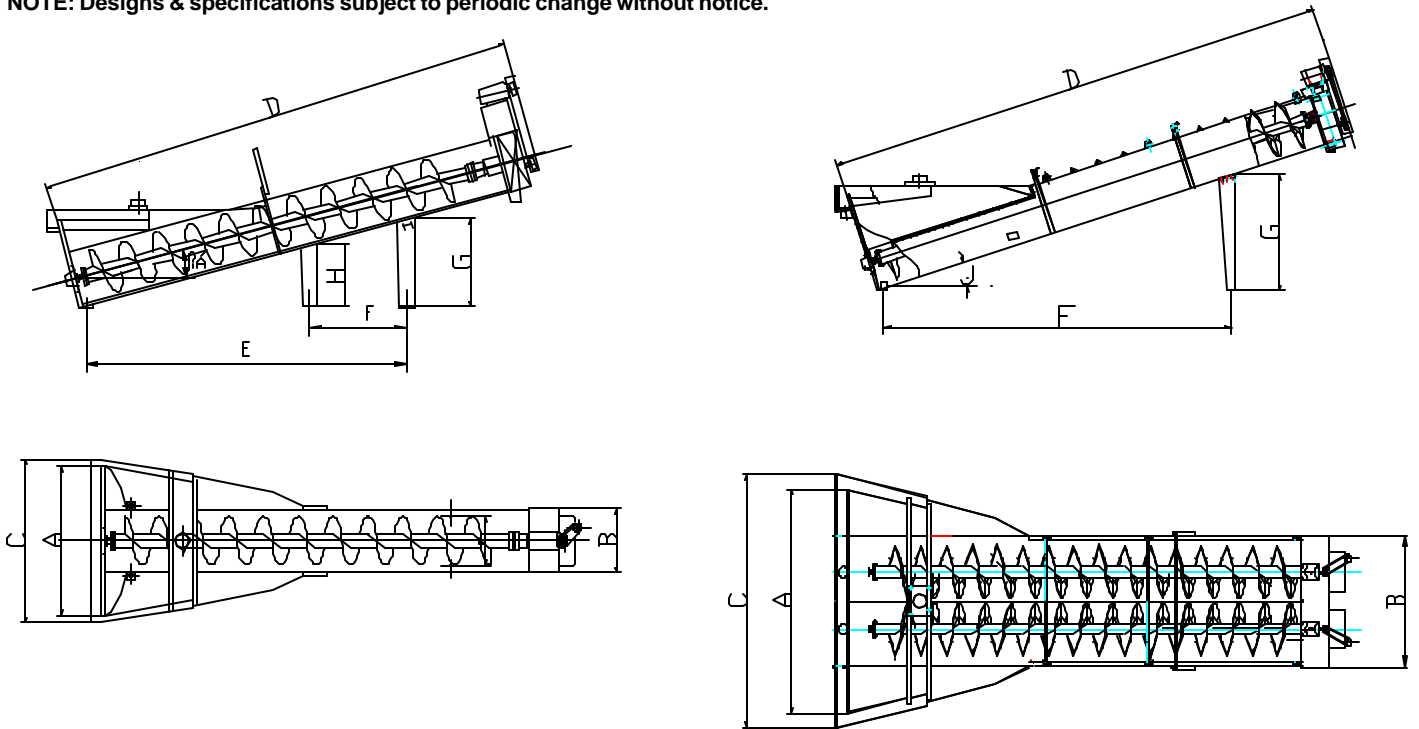

Spiral Diameter	Tub Length	A	B	C	D	E	F	G	H	J
36" Single	25'	8'-5"	3'-6"	9'-3"	26'-5"	19'-1"	-	5'-4"	-	18°
36" Twin	25'	11'-8"	6'-9"	12'-5"	26'-5"	19'-1"	-	5'-4"	-	18°
44" Single	32'	10'-9"	4'-6"	12'-11"	34'-6"	24'-4"	12'-6"	8'-2"	4'-2"	18°
44" Twin	32'	14'-8"	8'-4"	6'-9"	4'-6"	24'-4"	12'-6"	8'-2"	4'-2"	18°
54" Single	34'	12'	5'-5"	14'-8"	36'-4"	25'-4"	12'-10"	8'-6"	4'-4"	18°
54" Twin	34'	17'-10"	11'	20'-2"	36'-4"	25'-4"	12'-10"	8'-6"	4'-4"	18°